



Platinum

Receptacle for socket outlets or other wiring devices


Cat. No(s): 0 897 00/01/02/10/11/12



0 897 00/10



0 897 01/11

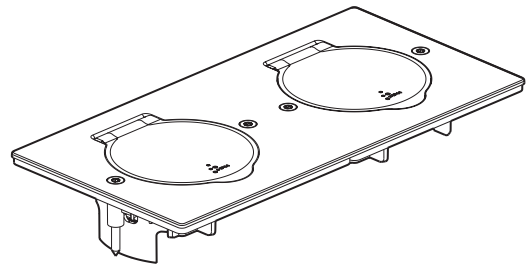

0 897 02/12

1. USE


Range of square, rectangular or round units for receiving floor sockets, supplied empty (to be fitted with mains voltage or ELV connections). For 45 x 45 functions

2. RANGE


| Description | Stainless steel | Golden brushed |
|--|-----------------|----------------|
| Receptacles for square floor sockets | 0 897 00 | 0 897 10 |
| Receptacles for round floor sockets | 0 897 01 | 0 897 11 |
| Receptacles for rectangular floor socket | 0 897 02 | 0 897 12 |

3. POSITIONING

- 3.1 For fixing to wall or furniture (e.g.: work surface) using Batibox Cat. No. 0 801 88




- 3.2 Batibox Cat. No. 0 819 88

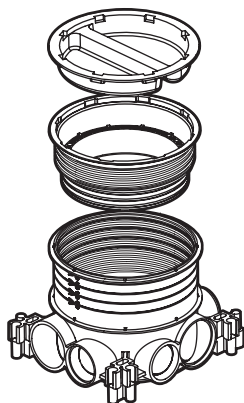


4. DIMENSIONS (mm)


- Cat. No. 0 897 00/10

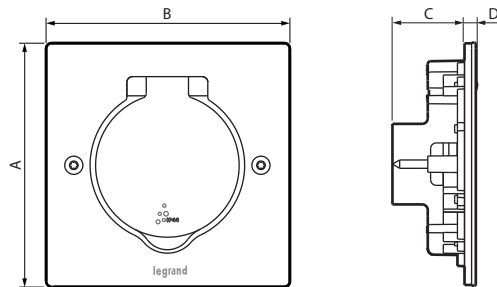

- Cat. No. 0 897 01/11

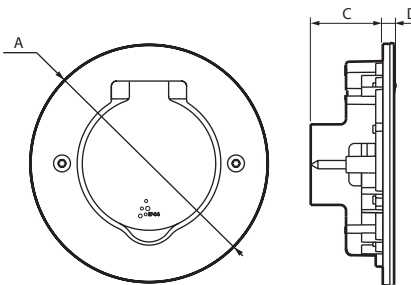


- Cat. No. 0 897 02/12

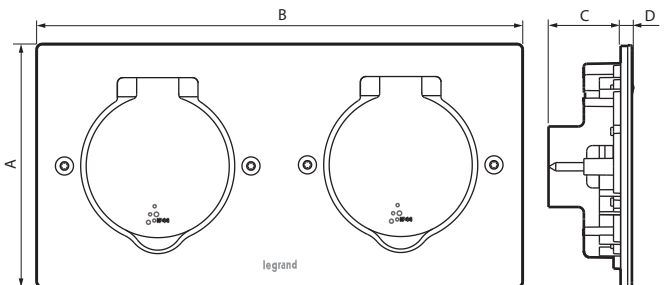


| References | A | B | C | D |
|-------------|----|-----|----|---|
| 0 897 00/10 | 86 | 86 | 28 | 2 |
| 0 897 01/11 | 90 | - | 28 | 2 |
| 0 897 02/12 | 86 | 172 | 28 | 2 |

4. DIMENSIONS (mm) (continued)

■ Cat. No 0 819 88

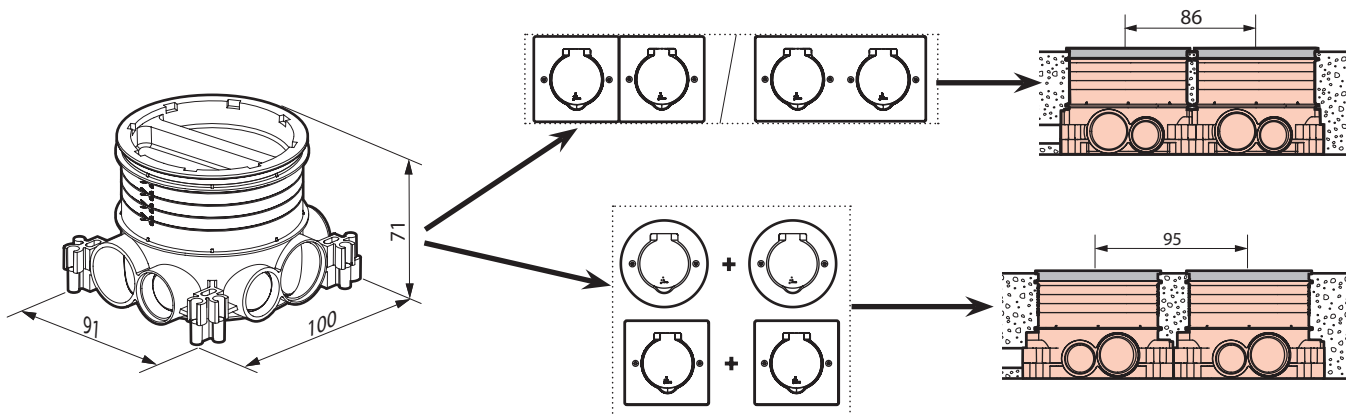

■ Batibox Cat. No 0 801 88

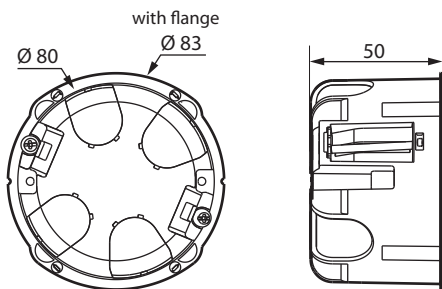

5. RECOMMENDATIONS

- For installing indoors or outdoors (in a protected unit).
- Essential requirement: Install the «small plugs» behind the plate if installing the socket using box Cat. No. 0 801 88.
- White indicator: Illuminated accessibility markings.

6. TECHNICAL CHARACTERISTICS

■ **6.1 Protection class**

IP 44 } Cover closed
 IK 08 }
 Cover can open 180°

■ **6.2 Material characteristics**

Stainless steel or Golden brushed
 Material: Zamak
 Fixing screws: stainless steel Torx T10
 Self-extinguishing:
 + 850°C / 30 s for insulating parts holding live parts in place
 + 650°C / 30 s for other parts made of insulating materials

■ **6.3 Climatic characteristics**

Storage temperature: - 10° C to + 60° C
 Use temperature: - 5° C to + 50° C

7. CLEANING

Do not use detergents.

8. ACCESSORIES

- Cat. No. 0 819 88: Single multi-material floor box, for concrete depth of 50 to 80 mm
- Cat. No. 0 897 19: Indicator light for floor socket - 230 V - 1 mA
- Cat. No. 0 897 09: Long screws (x 10)
- Cat. No. 0 800 88: Hole saw Ø 80
- Cat. No. 0 801 88: Batibox box